

FREE RUNNER

KPX120



Item no. KPX120-3617	
General Product Information	
Dimensions LxWxH	4'10" x 2'3" x 5'3"
Age Group	13+
Capacity	1 adult
Color Options	

The Free Runner trains your lower body with an even muscle resistance of no impact. By simulating a running experience familiar to most, the Free Runner does not require prior learning. Instead you can immediately step up and start running at an intensity of your own personal preference. By using the Free Runner, users will engage in an aerobic workout with no

resistance that can help them maintain a higher level of overall health and fitness. The Free Runner is for anyone aged 13 or above and it's ideal for seniors. It is marked with information about how to use the equipment as well as showing which muscle groups the exercise targets.



FREE RUNNER

KPX120



For ensuring the integrity of the main frame the support post is made of a hot-dip galvanized steel tube of 6.3", with a wall thickness of 0.16" and has a post cap made of powder-coated aluminum.



The sign consists of a 0.06" aluminum plate with serigraphyprint, sealed by a subsequent anodizing process, screwed on to a machined plate of 0.75" EcoCore™.



End caps are made of injection molded PA6 (polyamide - Nylon). A great protection to all conditions



Panels are constructed of 0.75" machined EcoCore™. EcoCore™ is a highly durable, ecofriendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material



Handlebar and pendulum arm are made of a hot-dip galvanized steel tube 1.9" with a wall thickness of 0.13". A strong connection which is necessary to withstand the forces created during this movement.



Bearing unit is constructed of hot-dip galvanized steel with a stainless steel AISI 304 shaft and two ball bearings. This will provide a smooth movement, even in the toughest circumstances.


Item no. KPX120-3617	
Installation Information	
Max. fall height	2'8"
Safety surfacing area	155 ft²
Numbers of Installers (persons)	2
Total installation time	6
Excavation volume	0.91 yd³
Concrete volume	0.55 yd³
Footing Depth (Standard)	2' 8"
Shipment Weight	278 lbs
Anchoring options	In-ground ✓ Surface ✓
Warranty information	
Galvanized structural parts	Lifetime
Panels	Lifetime
Bearings	2 Years
Spare parts guaranteed	10 Years

FREE RUNNER


KPX120

*Max fall height | **Total height | ***Safety surfacing area

*Max fall height | **Total height

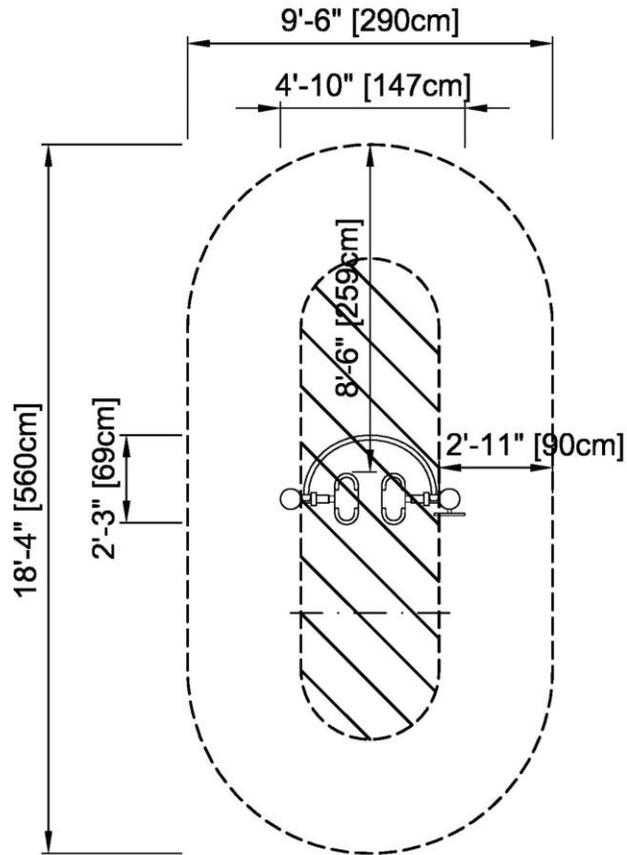

KPX120
* 2'-8" / 80cm
** 5'-3" / 159cm
*** 155ft² / 14.4m²
1/8" = 1'-0"

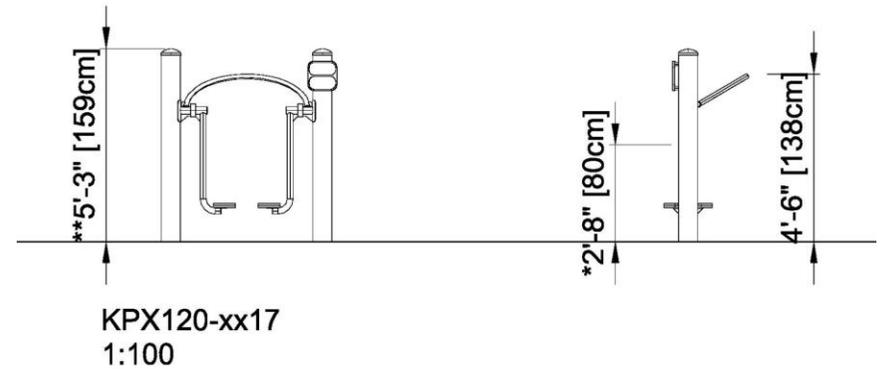

[Click to see 1:100 ratio TOP VIEW](#)

[Click to see 1:100 ratio SIDE VIEW](#)